

PRODUCT CATALOUGE



SEALANTS | ADHESIVES | PU FOAMS | SPRAY PAINTS | TAPES

www.nexfix.store


NEXFIX
Built on Trust. Sealed with Quality.



NEXFIX

Built on Trust. Sealed with Quality.



SEALANTS | ADHESIVES | PU FOAMS | SPRAY PAINTS | TAPES



ABOUT US

NEXFIX is a performance-driven brand delivering dependable sealing, bonding, and surface protection solutions engineered for professional construction, fit-out, and maintenance applications. Built on advanced formulations, stringent quality control, and real-world application expertise, NEXFIX products are designed to deliver consistent performance beyond laboratory conditions—ensuring strong adhesion, clean finishes, and long-term durability on site. By balancing premium-grade performance with practical affordability, NEXFIX enables professionals to achieve reliable results without compromise.

PRODUCT PORTFOLIO

Nexfix NX-525 Silicone Sealant, Nexfix PU Foam – Multi Purpose, Nexfix Spray Paint, NexfixContact Adhesive, Nexfix A951 PVC Glue, Nexfix NX-40 Rust Remover, Nexfix Masking Tape, Nexfix Aluminium Tape, Nexfix Duct Tape, Nexfix Clear Packaging Tape

OUR TEAM



NEXFIX

Built on Trust Sealed with Quality

Product Name : NEXFIX NX-525 (400 MI)

Flexible Seal · Strong Adhesion · Long-Lasting Performance

Product Overview

NEXFIX NX-525 Silicone Sealant is a high-performance, neutral-cure silicone sealant engineered for professional construction, glazing, and general sealing applications. It delivers excellent adhesion on non-porous substrates, superior flexibility to accommodate joint movement, and reliable waterproof performance in both interior and exterior environments.

Formulated for durability and clean finishing, NX-525 ensures consistent, site-ready performance beyond laboratory conditions—making it ideal for demanding professional use.

Key Features

- Excellent adhesion on non-porous surfaces
- High flexibility for joint movement accommodation
- Waterproof and weather-resistant sealing
- Smooth application with clean, professional finish
- Suitable for interior & exterior applications

Technical Data (Typical Values)

Base Chemistry	Neutral Cure Silicone
Density	~1.02 g/cm ³
Skin Formation Time	5–10 minutes
Initial Cure	1–2 hours
Full Cure	24 hours
Movement Capability	±25%
Shore A Hardness	18–22
Elongation at Break	>300%
Application Temperature	+5°C to +40°C
Service Temperature	-40°C to +120°C

Curing time may vary depending on temperature, humidity, and joint dimensions.

Suitable Applications

Glass · Aluminium · Ceramic · UPVC

Common Uses:

- Window & door frames
- Glazing applications
- Sanitary areas
- Expansion & connection joints

Application Method

- Ensure surfaces are clean, dry, and free from dust, oil, or grease.
- Cut the nozzle at the required angle and load the cartridge into a sealant gun.
- Apply sealant evenly into the joint.
- Tool immediately for a smooth finish.
- Allow adequate curing before water exposure.

Packaging & Colour Range

Packaging : 300 ml cartridge × 24 pcs / box

Available Colours:

White | Clear | Black | Grey | Beige | Brown

Storage & Shelf Life

- Shelf Life: 18 months from date of manufacture
- Store in a cool, dry place away from direct sunlight
- Do not expose to temperatures above 50°C



NEXFIX NX-525 (400 MI) Silicone Sealant

Available Colours:



Packaging: 400 ml x 24 pcs / box

Product Category: Silicone Sealant (Neutral Cure)

Pack Size: 400 MI

Packaging: Cartridge

Finish: Smooth & Flexible

Usage: Interior / Exterior

Application Type: Glazing & Sealing

Safety & Handling

- Use in well-ventilated areas
- Avoid prolonged skin contact
- In case of eye contact, rinse immediately with water
- Keep away from children and open flames
- Refer to MSDS for detailed safety information

Compliance & Quality Assurance

- Manufactured under ISO 9001 compliant quality systems
- Conforms to applicable ASTM / EN performance standards
- VOC-compliant formulation
- Non-toxic after curing

Technical Documentation

- Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)
- Available on request or at www.nexfix.store

Recommended For

- Glazing contractors
- Aluminium & UPVC fabricators
- Interior fit-out contractors
- Facility maintenance teams



Product Overview

NEXFIX NX51 UPVC High Pressure PVC Cement is a professional-grade solvent cement specially formulated for permanent bonding of UPVC pipes and fittings in high-pressure piping systems. It creates a strong fused joint by softening and chemically welding the pipe and fitting surfaces, ensuring leak-proof and long-lasting performance. Engineered for plumbing, industrial, and infrastructure applications, NX51 delivers fast setting, excellent pressure resistance, and consistent joint integrity even under demanding service conditions.

Key Features

- High-strength solvent cement for UPVC systems
- Suitable for high-pressure water supply applications
- Fast setting with strong permanent bond
- Excellent resistance to water pressure and leakage
- Professional-grade formulation for reliable site performance

Suitable Applications

- UPVC Pipes · UPVC Fittings · Water Supply Lines · Drainage Systems
- Plumbing & Industrial Piping
- Application Type: Bonding

Technical Data (Typical Values)

Parameter	Value
Base Chemistry	Solvent-based UPVC Cement
Appearance	Clear / Light Blue
Viscosity	Medium-bodied
Initial Set Time	Within minutes
Handling Strength	15-30 minutes
Full Cure	24 hours
Application Temperature	+5°C to +40°C
Service Pressure	Suitable for high-pressure UPVC systems
Joint Type	Chemical fusion weld

Curing time may vary depending on temperature, humidity, and joint dimensions.

Suitable Applications

- Glass
- Aluminium
- Ceramic
- UPVC

Common Uses

- Window & door frames
- Glazing applications
- Sanitary areas
- Expansion & connection joints

Application Method

- Ensure surfaces are clean, dry, and free from dust, oil, or grease.
- Cut the nozzle at the required angle and load the cartridge into a sealant gun.
- Apply sealant evenly into the joint.
- Tool immediately for a smooth finish.
- Allow adequate curing before water exposure.



NEXFIX NX51

- Packaging:** 473 ml x 12 pcs / box
- Category :** UPVC High Pressure PVC Cement
- Pack Size:** 473 ml
- Packaging:** Tin/Can
- Usage:** High-Pressure UPVC Systems
- Application Type:** Glazing & Sealing

Packaging & Colour Range

Packaging:

300 ml cartridge × 24 pcs / box

Available Colours:

White | Clear | Black | Grey | Beige | Brown

Storage & Shelf Life

Shelf Life: 18 months from date of manufacture

Store in a cool, dry place away from direct sunlight

Do not expose to temperatures above 50°C

Safety & Handling

Use in well-ventilated areas

Avoid prolonged skin contact

In case of eye contact, rinse immediately with water

Keep away from children and open flames

Refer to MSDS for detailed safety information

Compliance & Quality Assurance

Manufactured under ISO 9001 compliant quality systems

Conforms to applicable ASTM / EN performance standards

VOC-compliant formulation

Non-toxic after curing

Technical Documentation

Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)

Available on request or at www.nexfix.store

Recommended For

Glazing contractors

Aluminium & UPVC fabricators

Interior fit-out contractors

Facility maintenance teams





Product Overview

NEXFIX Multi-Purpose Acrylic Spray Paint is a fast-drying, high-quality acrylic-based spray paint engineered to deliver a smooth, uniform, and durable finish across a wide range of surfaces. It offers excellent coverage, strong adhesion, and effective surface protection, making it suitable for professional construction, maintenance, and decorative applications. Designed for ease of application and consistent results, NEXFIX Spray Paint ensures clean finishes, reliable colour performance, and long-lasting durability in both indoor and outdoor environments.

Key Features

- Smooth and uniform spray finish
- Fast drying with excellent coverage
- Strong adhesion on multiple substrates
- Durable and weather-resistant coating
- Easy application with professional results

Technical Data (Typical Values)

Parameter	Value
Base Chemistry	Acrylic Resin
Finish	Smooth, uniform
Touch Dry	10–15 minutes
Recoat Time	20–30 minutes
Hard Dry	Approx. 24 hours
Coverage	~1.5–2.0 m ² per can (single coat)*
Application Method	Aerosol Spray
Application Temperature	+10°C to +40°C
Weather Resistance	Good (after full curing)

Coverage may vary depending on surface condition, colour, and application method.

Suitable Applications

- Metal surfaces
- Wood
- Plastic
- Maintenance & repair works
- Decorative and touch-up applications

Application Method

- Clean the surface thoroughly and remove dust, oil, rust, or grease.
- Shake the can well until the agitator rattles freely.
- Hold the can approximately 25–30 cm from the surface.
- Apply multiple thin, even coats for best results.
- Allow 10–15 minutes between coats.

Packaging & Colour Range

Packaging:

- 400 ml aerosol can × 12 pcs / box
- Net content: approx. 280 g per can

Available Colours:

- Cream | Beige | Brown | Grey | White | Black | Red

NEXFIX Spray Paint

Available Colours:



Packaging : 400 ml x 12 pcs / box

Product Category: Multi-Purpose Acrylic Spray

Product Type: Storable Product

Packaging: Aerosol Can

Application Type: Surface Coating / Painting

Storage & Shelf Life

Shelf Life: Up to 3 years

Store in a cool, dry place away from direct sunlight

Do not expose to temperatures above 50°C

Safety & Handling

Use in well-ventilated areas

Avoid inhalation of spray mist

Do not puncture or incinerate the can

Keep away from heat, sparks, and open flames

Keep out of reach of children

Refer to MSDS for detailed safety information

Compliance & Quality Assurance

Manufactured under ISO 9001 compliant quality systems

VOC-compliant formulation (where applicable)

Designed for professional and industrial use

Technical Documentation

Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)

Available on request or at www.nexfix.store

Recommended For

Maintenance contractors

Fabrication & repair workshops

Interior fit-out teams

Industrial & household applications



NEXFIX

Built on Trust Sealed with Quality

Product Name : NEXFIX Contact Adhesive

Instant Bond · High Strength · Professional Performance

Product Overview

NEXFIX Heavy Duty Contact Adhesive is a high-performance adhesive formulated for fast, strong, and durable bonding across a wide range of porous and non-porous materials. It provides excellent initial tack with high final bond strength, making it ideal for professional interior, furniture, and construction applications where immediate holding power and long-term durability are required.

Designed for reliable site performance, NEXFIX Contact Adhesive ensures consistent bonding, ease of application, and dependable results in demanding working conditions.

Key Features

- High initial grab with strong final bond
- Fast drying and easy to apply
- Excellent adhesion on multiple materials
- Durable and moisture-resistant bonding
- Suitable for professional and industrial use

Technical Data (Typical Values)

Parameter	Value
Base Chemistry	Synthetic Rubber / Solvent-based
Appearance	Amber liquid
Application Method	Brush / Roller / Spatula
Open Time	5-15 minutes
Initial Bond Strength	Immediate on contact
Full Strength	Within 24 hours
Coverage	~3-4 m ² per litre (double coat)*
Application Temperature	+10°C to +40°C
Heat Resistance	Moderate

Coverage may vary depending on substrate porosity and application thickness.

Suitable Applications

- Laminate
- Plywood
- Wood & MDF
- Foam
- Rubber
- Leather
- Fabric

Common Uses:

- Furniture manufacturing
- Interior fit-outs
- Panel fixing
- Flooring & cladding works

Application Method

- Ensure both surfaces are clean, dry, and free from dust or oil.
- Apply a thin, even coat of adhesive on both surfaces.
- Allow adhesive to air-dry until tacky.
- Join surfaces carefully and press firmly.
- Apply uniform pressure to achieve strong bonding.

Packaging:

- 600 ml tin × 12 pcs / box
- Net content: approx. 750 g per tin



NEXFIX CONTACT ADHESIVE

Packaging: 600 ml x 12 pcs / box

Product Type: Heavy Duty Grade

Pack Size: 600 ml

Packaging: Tin/Can

Usage: Interior / Exterior

Application Type: Bonding / Contact Adhesion

Storage & Shelf Life

- Store in a cool, dry place
- Keep container tightly closed after use
- Protect from direct sunlight and heat

Safety & Handling

- Use in well-ventilated areas
- Avoid prolonged skin contact
- Do not inhale vapours
- Keep away from heat, sparks, and open flames
- Keep out of reach of children
- Refer to MSDS for detailed safety instructions

Compliance & Quality Assurance

- Manufactured under ISO 9001 compliant quality systems
- Designed for professional construction and industrial use
- Consistent quality and performance under site conditions

Technical Documentation

- Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)
- Available on request or at www.nexfix.store

Recommended For

- Furniture manufacturers
- Interior contractors
- Joinery & fit-out professionals
- Maintenance and repair teams



NEXFIX

Built on Trust Sealed with Quality

Product Name : NEXFIX NX40 Anti-Rust Spray

Corrosion Protection · Long-Lasting Shield · Professional Grade



Product Overview

NEXFIX NX40 Anti-Rust Spray is a high-performance protective coating formulated to prevent rust and corrosion on metal surfaces. It forms a durable, moisture-resistant barrier that protects metal from oxidation, humidity, and environmental exposure, thereby extending the service life of tools, equipment, and metal structures.

Engineered for professional maintenance, industrial, and construction applications, NX40 delivers reliable coverage, strong adhesion, and long-lasting corrosion protection in both indoor and outdoor environments.

Key Features

- Effective rust and corrosion protection
- Strong adhesion on metal substrates
- Moisture- and oxidation-resistant coating
- Durable, long-lasting protective film
- Easy spray application with uniform coverage

Technical Data (Typical Values)

Parameter	Value
Base Chemistry	Modified Alkyd / Anti-Corrosive Resin
Appearance	Protective coloured coating
Touch Dry	10–15 minutes
Recoat Time	20–30 minutes
Full Cure	24 hours
Coverage	~1.5–2.0 m ² per can (single coat)*
Application Method	Aerosol Spray
Application Temperature	+10°C to +40°C
Weather Resistance	Good after full curing

Coverage may vary depending on surface preparation and application thickness.

Suitable Applications

- Metal structures
- Tools and machinery
- Automotive parts
- Equipment frames
- Maintenance & repair works

Application Method

- Remove loose rust, dirt, oil, and grease from the surface.
- Clean and dry the surface thoroughly.
- Shake the can well before use.
- Hold the can 20–25 cm away from the surface.
- Spray evenly in light coats for best protection.
- Allow adequate drying before handling or recoating.

Packaging:

400 ml aerosol can × 12 pcs / box

Storage & Shelf Life

- Store in a cool, dry place away from direct sunlight
- Do not expose to temperatures above 50°C
- Keep container away from heat sources

NEXFIX NX40 ANTI RUST SPRAY

Packaging: 400 ml x 12 pcs / box

Product Type: Anti Rust Spray

Pack Size: 400 ml

Packaging: Aerosol Can

Usage: Indoor & Outdoor

Finish: Protective Coating

Application Type: Surface Protection /
Anti-Corrosion Coating

Safety & Handling

- Use in well-ventilated areas
- Avoid inhalation of spray mist
- Do not puncture or incinerate the can
- Keep away from heat, sparks, and open flames
- Keep out of reach of children
- Refer to MSDS for detailed safety information

Compliance & Quality Assurance

- Manufactured under ISO 9001 compliant quality systems
- Designed for industrial and professional maintenance use
- Provides long-term corrosion protection under normal service conditions


Technical Documentation

- Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)
- Available on request or at www.nexfix.store

Recommended For

- Maintenance contractors
- Industrial facilities
- Fabrication workshops
- Automotive and equipment maintenance teams



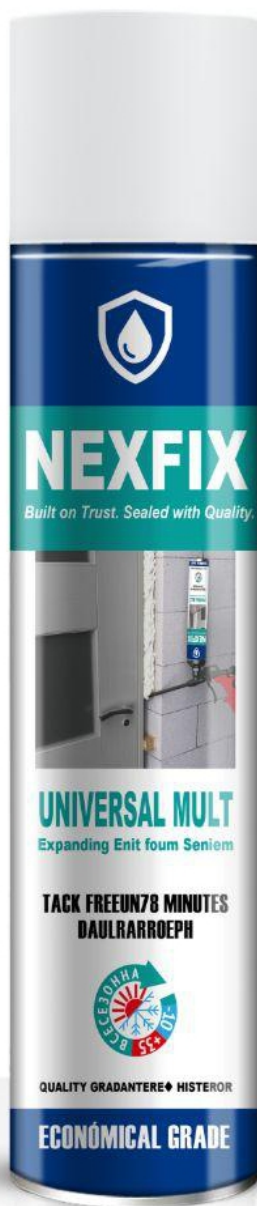

Product Overview:

NEXFIX PU Foam is a high-performance, one-component expanding polyurethane foam designed for professional filling, sealing, and insulation applications. It cures with atmospheric moisture to form a rigid, durable, and airtight foam structure, delivering excellent thermal and acoustic insulation.

Engineered for construction and maintenance professionals, NEXFIX PU Foam provides controlled expansion, strong adhesion to common building substrates, and dependable performance under real site conditions.

Key Features

- Controlled expansion for precise gap filling
- Excellent thermal and acoustic insulation
- Strong adhesion to most construction materials
- Easy application with consistent results
- Suitable for interior and exterior use

Technical Data (Typical Values)

Parameter	Value
Base Chemistry	Polyurethane
Appearance	Expanding foam
Tack Free Time	8-12 minutes
Cutting Time	30-45 minutes
Full Cure	~24 hours
Expansion	Controlled
Application Temperature	+5°C to +35°C
Service Temperature	-40°C to +90°C

Values may vary depending on temperature, humidity, and application conditions.

Available Variant & Packaging

- Product
- Pack Size
- Packaging
- NEXFIX PU Foam
- Standard aerosol can
- As per variant

Suitable Applications

- Door and window frame installation
- Gap filling around pipes, ducts, and conduits
- Sealing cracks, voids, and cavities
- Thermal and sound insulation works

Available Variant & Packaging

- Product
- Pack Size
- Packaging
- NEXFIX PU Foam
- Standard aerosol can
- As per variant

Suitable Applications

- Door and window frame installation
- Gap filling around pipes, ducts, and conduits
- Sealing cracks, voids, and cavities
- Thermal and sound insulation works

NEXFIX NX40 ANTI RUST SPRAY

Packaging: 400 ml x 12 pcs / box

Product Type: Anti Rust Spray

Pack Size: 400 ml

Packaging: Aerosol Can

Usage: Indoor & Outdoor

Finish: Protective Coating

Application Type: Surface Protection /
Anti-Corrosion Coating

Application Method

- Clean and slightly moisten the surface before application.
- Shake the can thoroughly before use.
- Apply foam carefully, filling gaps partially to allow for expansion.
- Allow foam to expand and cure fully.
- Trim excess foam after curing.

Limitations

- Not UV resistant; cured foam must be protected or covered
- Not suitable for continuous water immersion
- Overfilling may cause excessive expansion
- Not intended for structural load-bearing applications

Storage & Shelf Life

- Shelf Life: 24 months from date of manufacture
- Store upright in a cool, dry place
- Protect from direct sunlight
- Do not expose to temperatures above 50°C

Safety & Handling

- Use only in well-ventilated areas
- Avoid inhalation of vapours and contact with eyes or skin
- Wear gloves and eye protection during application

Compliance & Quality Assurance


- Manufactured under ISO 9001 compliant quality systems
- GHS-aligned safety documentation available
- Designed for professional construction and maintenance use

Technical Documentation

- Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)
- Available on request or at www.nexfix.store

Recommended For

- Contractors & applicators
- Window and door fabricators
- HVAC installers
- Maintenance and facility teams

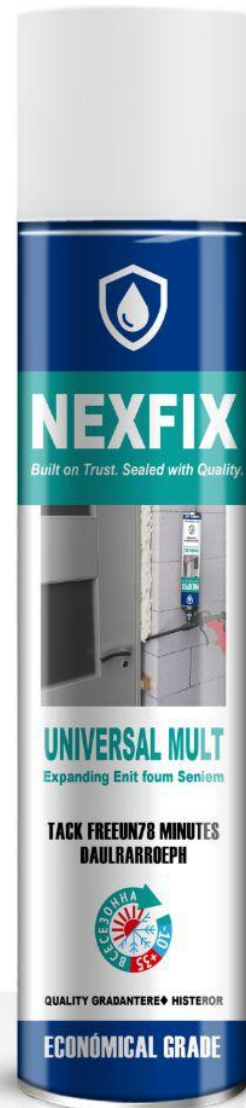

Product Overview

NEXFIX Masking Tape is a high-quality adhesive tape engineered for precise masking, surface protection, and clean paint finishing applications. It provides reliable adhesion during use while allowing easy, residue-free removal without damaging underlying surfaces.

Designed for professional painters, contractors, and interior teams, NEXFIX Masking Tape ensures sharp paint edges, consistent adhesion, and dependable performance across a wide range of interior and general-purpose applications.

Key Features

- Strong yet residue-free adhesion
- Clean removal without surface damage
- Easy tear with smooth application
- Good conformability on smooth surfaces
- Reliable performance for professional use

Technical Data (Typical Values)

Parameter	Value
Backing Material	Crepe Paper
Adhesive Type	Rubber-based
Adhesion Behaviour	Clean peel, residue-free
Temperature Resistance	Up to 60°C (short-term)
Application Method	Manual
Surface Compatibility	Painted walls, metal, glass, wood
Usage Environment	Interior & general-purpose

Performance may vary depending on surface condition, paint type, and duration of application.

Available Variants & Sizes

Product	CodeSize
NX-TAP-MSK-2X20	2" × 20 yards
NX-TAP-MSK-2X25	2" × 25 yards
NX-TAP-MSK-2X30	2" × 30 yards
NX-TAP-MSK-2X50	2" × 50 yards

Suitable Applications

- Painting & coating works
- Surface masking
- Edge protection
- Temporary holding and protection

Application Method

- Ensure the surface is clean, dry, and free from dust or oil.
- Apply tape firmly along the required edge or surface.
- Press evenly to ensure proper adhesion.
- Carry out painting or coating work as required.
- Remove tape gently after use for clean, sharp lines.

Packaging:

24 rolls per box (all variants)

Storage & Shelf Life

- Store in a cool, dry place
- Avoid direct sunlight and moisture
- Do not apply on wet or oily surfaces



NEXFIX MASKING TAPE

Packaging: 24 pcs / box

Product Type: Professional Surface Protection Tape

Packaging: Roll

Adhesion: Clean peel, residue-free

Usage: Interior & General Purpose

Application Type: Masking / Surface Protection

Safety & Handling

- Use only on recommended surfaces
- Avoid prolonged exposure to heat
- Keep away from children
- Dispose responsibly after use

Compliance & Quality Assurance

- Manufactured under ISO 9001 compliant quality systems
- Designed for professional painting and finishing applications
- Consistent adhesion and clean removal performance

Technical Documentation

- Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)
- Available on request or at www.nexfix.store

Recommended For

- Professional painters
- Interior contractors
- Fit-out & finishing teams
- Maintenance and repair works





Product Overview

NEXFIX Aluminium Tape is a high-quality, pressure-sensitive adhesive tape engineered for sealing, insulation, and heat-resistant applications. Manufactured with a durable aluminium foil backing, it provides excellent resistance to heat, moisture, ageing, and environmental exposure. Designed for professional HVAC, insulation, and construction use, NEXFIX Aluminium Tape delivers strong adhesion, superior conformability, and long-lasting sealing performance on smooth and irregular surfaces.

Key Features

- Strong aluminium foil backing
- Excellent heat and moisture resistance
- High adhesive strength with long-term durability
- Conforms easily to irregular and uneven surfaces
- Reflective surface for improved thermal efficiency

Technical Data (Typical Values)

Parameter	Value
Backing Material	Aluminium Foil
Adhesive Type	Acrylic Pressure-Sensitive
Adhesion Strength	High-tack
Temperature Resistance	Up to 120°C (short-term)*
Moisture Resistance	Excellent
Application Method	Manual
Usage Environment	Indoor & Outdoor

Temperature resistance may vary depending on surface condition and exposure duration.

Available Variants & Sizes

Product Code	Size	Rolls / Box
NX-TAP-ALU-2X20	2" x 20 yards	24
NX-TAP-ALU-3X20	3" x 20 yards	16

Suitable Applications

- HVAC duct sealing
- Thermal insulation joints
- Vapour barrier sealing
- Construction & maintenance works

Application Method

- Ensure the surface is clean, dry, and free from dust or oil.
- Cut tape to the required length.
- Apply firmly along the joint or surface.
- Press evenly to ensure complete contact and strong adhesion.
- Ensure proper sealing at edges for maximum performance.

Packaging:

- 2" x 20 yards: 24 rolls per box
- 3" x 20 yards: 16 rolls per box

Storage & Shelf Life

- Store in a cool, dry place
- Avoid moisture and direct sunlight
- Apply only on clean, dry surfaces

NEXFIX ALUMINIUM TAPE

Product Type: Heat-Resistant Sealing & Insulation Tape

Packaging: Roll

Backing: Aluminium Foil

Adhesion: High-tack

Usage: Indoor & Outdoor

Application Type: Sealing / Insulation

Safety & Handling

- Avoid contact with sharp edges of foil
- Use appropriate hand protection if required
- Keep away from children
- Dispose responsibly after use

Compliance & Quality Assurance

- Manufactured under ISO 9001 compliant quality systems
- Designed for professional HVAC and insulation applications
- Consistent performance under varying environmental conditions

Technical Documentation

- Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)
- Available on request or at www.nexfix.store

Recommended For

- HVAC contractors
- Insulation installers
- Construction & maintenance teams
- Industrial service providers



Product Overview

NEXFIX Duct Tape is a heavy-duty, fabric-reinforced adhesive tape designed for strong sealing, repairing, and bundling applications across construction, HVAC, and maintenance environments. It combines a high-tack adhesive with a durable backing to deliver reliable adhesion, tear resistance, and long-lasting performance.

Engineered for professional use, NEXFIX Duct Tape performs consistently even under demanding site conditions, making it a dependable solution for temporary and semi-permanent applications.

Key Features

- Strong fabric-reinforced backing
- High-tack adhesive for secure bonding
- Durable and tear-resistant construction
- Flexible and easy to apply
- Suitable for indoor and outdoor use

Technical Data (Typical Values)

Parameter	Value
Backing Material	Polyethylene-coated fabric
Adhesive Type	Rubber-based
Adhesion Strength	High-tack
Tear Resistance	High
Temperature Resistance	Up to 70°C (short-term)*
Application Method	Manual
Usage Environment	Indoor & Outdoor

Performance may vary depending on surface condition, temperature, and duration of exposure.

Available Variants & Sizes

Product Code	Size	Rolls / Box
NX-TAP-DCT-2X20	2" × 20 yards	24

Suitable Applications

- Duct sealing
- Repairs and patching
- Bundling and holding
- Construction & HVAC works
- Maintenance and emergency repairs

Application Method

- Ensure the surface is clean, dry, and free from dust or oil.
- Cut tape to the required length.
- Apply firmly over the area to be sealed or repaired.
- Press evenly to ensure strong adhesion.
- Smooth edges for a secure and durable finish.

Packaging:

2" × 20 yards: 24 rolls per box

Storage & Shelf Life

- Store in a cool, dry place
- Avoid prolonged exposure to heat or moisture
- Apply only on clean, dry surfaces

Safety & Handling

- Avoid contact with sharp edges during tearing
- Keep away from children
- Dispose responsibly after use

NEXFIX DUCT TAPE

Packaging: 24 pcs & 16 pcs / box

Product Type: Heavy-Duty Reinforced Adhesive Tape

Packaging: Roll

Backing: Aluminium Foil

Adhesion: High-tack

Usage: Indoor & Outdoor

Application Type: Sealing / Repair / Bundling

Compliance & Quality Assurance


Manufactured under ISO 9001 compliant quality systems
Designed for professional construction and maintenance use
Reliable performance under varied site conditions

Technical Documentation

Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)
Available on request or at www.nexfix.store

Recommended For

HVAC contractors
Maintenance teams
Construction professionals
Facility management services

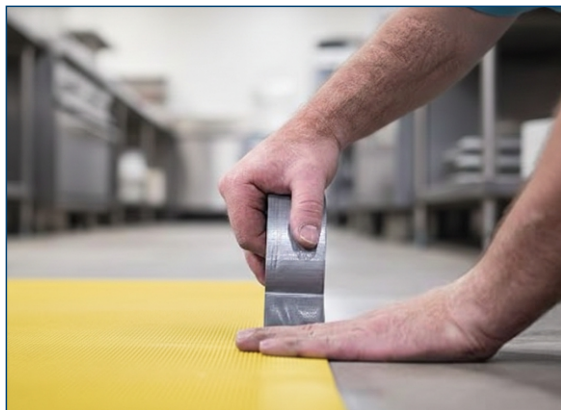



Product Name : NEXFIX Clear Packaging Tape

Transparent Finish · Strong Seal · Clean Packaging

Product Overview

NEXFIX Clear Packaging Tape is a high-quality transparent adhesive tape designed for secure carton sealing, packaging, and general-purpose bundling applications. It offers strong and reliable adhesion with excellent clarity, ensuring a neat, professional appearance without obscuring labels, barcodes, or printed information.

Engineered for smooth unwinding and consistent performance, NEXFIX Clear Tape is ideal for warehouse operations, retail packaging, logistics, and commercial use.

Key Features

- High transparency for clean appearance
- Strong and reliable adhesion
- Smooth, low-noise unwinding
- Tear-resistant and durable backing
- Suitable for everyday packaging and sealing

Technical Data (Typical Values)

Parameter	Value
Backing Material	BOPP Film
Adhesive Type	Acrylic-based
Finish	Transparent
Adhesion Strength	Medium to High
Noise Level	Low-noise unwind
Application Method	Manual / Dispenser
Usage Environment	Indoor & General Purpose

Performance may vary depending on carton quality, surface condition, and storage environment.

Available Variants & Sizes

Product Code	Size	Rolls / Box
NX-TAP-CLR-2X50	2" x 50 yards	36

Suitable Applications

- Carton sealing
- Packaging & dispatch
- Bundling and wrapping
- General-purpose sealing

Application Method

- Ensure the carton or surface is clean and dry.
- Pull tape smoothly from the roll.
- Apply firmly along the carton seam or sealing area.
- Press evenly to ensure strong adhesion.
- Cut tape neatly for a clean and professional finish.

Packaging:

2" x 50 yards: 36 rolls per box

Storage & Shelf Life

- Store in a cool, dry place
- Avoid direct sunlight, dust, and moisture
- Maintain storage temperature below 30°C

Safety & Handling

- Use appropriate cutting tools to avoid injury
- Keep away from children
- Dispose used cores and tape responsibly

NEXFIX CLEAR TAPE

Packaging: 36 pcs / box

Product Type: Transparent Packaging & Sealing Tape

Packaging: Roll

Finish: Transparent

Usage: Indoor & Outdoor

Application Type: Packaging / Sealing

Compliance & Quality Assurance


Manufactured under ISO 9001 compliant quality systems
Designed for commercial and professional packaging use
Consistent adhesion and clarity across production batches

Technical Documentation

Technical Data Sheet (TDS) and Material Safety Data Sheet (MSDS)
Available on request or at www.nexfix.store

Recommended For

Warehouses & logistics operators
Retail packaging teams
E-commerce fulfillment centers
Office & commercial use

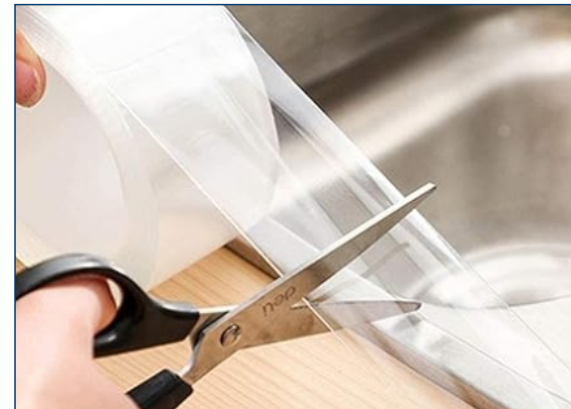



NEXFIX

Built on Trust. Sealed with Quality.

Get In touch



+971 0529719401, +971 503215936



www.nexfix.store



nexfix.uae@gmail.com



Follow Us



NEXFIX BUILDING MATERIALS TRADING LLC

📍 OFFICE NO 482, AI KHUBAISI, DEIRA, DUBAI